

NAMONKAR HST


Thin wall heat shrinkable tube

Thin Wall Heat Shrinkable Tube is newly developed environment-friendly flame retardant heat shrinkable tube, using modified polymers, through cross-link by electronic accelerator. When heat shrink tubing quickly shrinks, it can molds itself to the specific size and shape of the wire.

Picture



Drawing

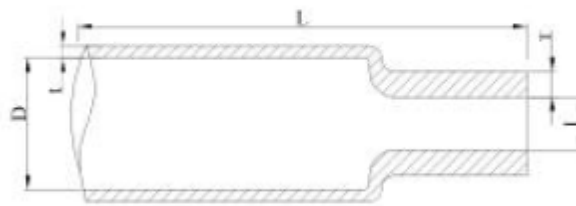

Application

It widely used in the fields of electrics, communication, automobile for connection insulation and rust-proof of metal product where thin thickness is required.

Technical data	
Material	Polyethylene/ Polyolefin
Shrinking ratio	2:1
Operating range	-45°C - +125°C
Start shrunk temperature	70°C
Longitudinal shrinkage	5%
Flammability	VW-1
Standard colour	Black
Certificate	<u>UL CSA RoHS</u> Halogen free
Tool	Heat gun

DATA SHEET:-

Part No.	SIZE	As Supplied		After Recovery		M/SPOOL	APPLICATION RANGE
		I.D	AVERAGE W.T	MAX I.D	AVERAGE W.T.		
Namonkar HST- 1	1	1.5±0.3	0.12±0.05	≤0.65	0.20±0.1	200	0.7-1.0
Namonkar HST- 1.5	1.5	1.9±.3	0.13±0.05	≤0.85	0.20±0.1	200	0.9-1.4
Namonkar HST- 2	2	2.35±0.3	0.15±0.05	≤1	0.22±0.1	200	1.1-1.8
Namonkar HST- 2.5	2.5	2.8±0.4	0.15±0.05	≤1.3	0.25±0.1	200	1.4-2.3
Namonkar HST- 3	3	3.4±0.4	0.15±0.05	≤1.5	0.28±0.1	200	1.6-2.7



NAMONKAR ENTERPRISES

INSULATE • TERMINATE • BUNDLE • IDENTIFY

Namonkar HST- 3.5	3.5	3.8±0.4	0.15±0.05	≤1.8	0.28±0.1	200	1.9-3.2
Namonkar HST- 4	4	4.4±0.4	0.18±0.05	≤2	0.35±0.1	200	2.1-3.6
Namonkar HST- 4.5	4.5	4.7±0.4	0.18±0.05	≤2.3	0.35±0.1	200	2.4-4.0
Namonkar HST- 5	5	5.5±0.4	0.18±0.05	≤2.5	0.37±0.1	100	2.6-4.5
Namonkar HST- 6	6	6.50±0.4	0.20±0.05	≤3	0.39±0.1	100	3.1-5.4
Namonkar HST- 7	7	7.5±0.4	0.18±0.05	≤3.5	0.32±0.1	100	3.7-6.3
Namonkar HST- 8	8	8.5±0.5	0.18±0.05	≤4	0.32±0.1	100	4.2-7.2
Namonkar HST- 9	9	9.5±0.5	0.18±0.05	≤4.5	0.35±0.1	100	4.7-8.0
Namonkar HST- 10	10	10.5±0.5	0.18±0.05	≤5.5	0.35±0.1	100	5.2-9.0
Namonkar HST- 11	11	11.5±0.5	0.18±0.05	≤5.5	0.4±0.1	100	5.7-10.0
Namonkar HST- 12	12	12.5±0.5	0.20±0.05	≤6	0.4±0.1	100	6.2-11.0
Namonkar HST- 13	13	13.5±0.5	0.20±0.05	≤6.5	0.4±0.1	100	6.7-12.0
Namonkar HST- 14	14	14.5±0.5	0.20±0.05	≤7	0.4±0.1	100	7.3-13.0
Namonkar HST- 15	15	15.5±0.5	0.20±0.05	≤7.5	0.4±0.1	100	7.8-14.8
Namonkar HST- 16	16	16.5±0.5	0.22±0.05	≤8	0.4±0.1	100	8.3-15.8

**3, Raghunandan Complex, Mantarwadi Phata, Phursungi,
PUNE – 412308, Email – akrjain1202@gmail.com**



INSULATE • TERMINATE • BUNDLE • IDENTIFY

NAMONKAR ENTERPRISES

Namonkar HST- 18	18	18.5±0.5	0.22±0.05	≤9	0.45±0.1	100	9.3-17.0
Namonkar HST- 20	20	20.5±0.5	0.22±0.05	≤10	0.45±0.1	100	10.5-19.0
Namonkar HST- 22	22	22.8±0.5	0.22±0.05	≤11	0.45±0.1	100	11.5-20.5
Namonkar HST- 25	25	25.5±0.5	0.22±0.05	≤12.5	0.45±0.1	50	12.5-25.5

UNIT : mm

1) NAMONKAR HST is available upto size 180mm.

**3, Raghunandan Complex, Mantarwadi Phata, Phursungi,
PUNE – 412308, Email – akrjain1202@gmail.com**